

jc625 U.S. PTO
12/20/99

12-21-99

A

Patent Application
Docket No. 34647-00405USPT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

jc542 U.S. PTO
09/467420
12/20/99

In re patent application of: Anders Hoff and Anders Lundström

For: **SIGNAL PRIORITIZATION IN A COMMUNICATIONS SYSTEM**

BOX PATENT APPLICATION
Assistant Commissioner
for Patents
Washington, D.C. 20231

<p>CERTIFICATE OF MAILING BY EXPRESS MAIL</p> <p>"EXPRESS MAIL" Mailing Label No. EL269312745US</p> <p>Date of Deposit: December 20, 1999</p> <p>I hereby certify that this paper or fee is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231</p> <p>Type or Print Name: Carol Mitchell</p> <p><i>Carol Mitchell</i></p> <p>Signature</p>

Sir:

PATENT APPLICATION TRANSMITTAL LETTER

Transmitted herewith for filing, please find the following:

- X Specification, claims and abstract of the above-referenced patent application (total of 44 pages)
- X Five (5) sheet(s) of drawing(s) (___ formal/ X informal (Figs. 1-7B).
- X Combined Declaration and Power of Attorney (Unexecuted).
- ___ An Assignment of the invention to: _____.
- ___ A verified statement claiming small entity status under 37 CFR 1.9 and 1.27.
- ___ Information Disclosure Statement with References _____ and Form PTO-1449.
- X Other (specify): Acknowledgment postcard.

X The filing fee has been calculated as shown below:

	<u>NO. FILED</u>	<u>NO. EXTRA</u>	<u>RATE</u>	<u>FEE</u>
<u>BASIC FEE</u>				<u>\$760</u>
<u>TOTAL CLAIMS</u>	<u>32-20</u>	<u>12</u>	<u>\$18</u>	<u>216</u>
<u>INDEPENDENT CLAIMS</u>	<u>4- 3</u>	<u>1</u>	<u>\$78</u>	<u>78</u>
<u>MULTIPLE DEPENDENT CLAIM(S) PRESENTED</u>			<u>\$260</u>	
<u>TOTAL FEES:</u> _____				<u>\$1054</u>
<u>Deduct one-half of fee for Small Entity</u>				
<u>ASSIGNMENT RECORDAL FEE</u>			<u>\$40</u>	
<u>TOTAL AMOUNT DUE:</u>				<u>\$1054</u>

_____ Please charge my Deposit Account No. 10-0447 in the amount of \$_____.

X A check in the amount of \$1054.00 for Application Filing Fee is attached. Please charge any deficiency or credit any overpayment to Deposit Account No. 10-0447.

X The Commissioner is hereby authorized to charge payment of the following fees for filing or anytime during the pendency of this application or credit any overpayment to Deposit Account No. 10-0447.

X Any patent application processing fees under 37 CFR 1.17 and under 37 CFR 1.20(d).

_____ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).

X Any filing fees under 37 CFR 1.16 including fees for presentation of extra claims.

Respectfully submitted,

Keith W. Saunders

Keith W. Saunders

Registration No. 41,462

JENKENS & GILCHRIST
3200 Fountain Place
1445 Ross Avenue
Dallas, Texas 75202-2799
214/855-4732 (Direct)
214/855-4300 (Fax)

Patent Application
Docket #34647-00405USPT
P12217US1

Inventors:
Anders Hoff
Anders Lundström

CERTIFICATE OF MAILING BY EXPRESS MAIL
"EXPRESS MAIL"
Mailing Label No EL269312745US.
Date of Deposit December 20, 1999 .
I hereby certify that this paper or fee
is being deposited with the U.S. Postal
Service "Express Mail Post Office to
Addressee" service under 37 CFR 1.10 on
the date indicated above and is
addressed to:
Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231
Type or Print Name: Carol Mitchell . .
<i>Carol Mitchell</i> . .
Signature

SIGNAL PRIORITIZATION IN A COMMUNICATIONS SYSTEM

BACKGROUND OF THE INVENTION

Technical Field of the Invention

The present invention relates in general to the field
of communication systems, and in particular, by way of
example only, to prevention of signaling traffic overload
5 within a cellular communication system employing a location
management scheme.

Description of Related Art

Modern cellular communication systems, such as cellular communication systems based on IS-136 specifications, typically employ a location management scheme that enables the cellular network to quickly locate a target mobile station in response to an incoming call. In a zone-based location management scheme, for example, the cellular coverage area is divided into non-overlapping location areas, where each location area may include one or more individual cells. When a mobile station powers up or enters a new location area, the mobile station initiates a location update request or registration over a reverse access channel associated with the serving base station. The cellular network then accesses the Home Location Register associated with the mobile station and updates the stored indication of the mobile station's current location. When the cellular network receives an incoming call addressed to a target mobile station, the cellular network usually broadcasts a paging message over forward control channels associated with all the base stations within the target mobile station's last

updated location area. The target mobile station responds by transmitting an acknowledgment message over the serving base station's reverse access channel, thereby enabling the cellular network to identify the base station currently
5 serving the target mobile station and to route the incoming call accordingly.

The forward control channel(s) of cellular networks are conventionally used for other messages besides paging messages. In other words, the forward control channel(s) are
10 typically shared among many different types of messages that are transmitted from the cellular network to one or more mobile stations. For example, access response messages may share the forward control channel(s) with paging messages. An access response message is a message sent from the
15 cellular network to a specific mobile station that has previously requested access to the cellular network (e.g., a specific mobile station that has requested initiation of a phone call).

In order to complete an incoming call in a timely
20 fashion, among other reasons, paging messages are frequently given priority over access response messages. Unfortunately,

one resulting significant problem associated with cellular communication systems is that paging messages may supplant access response messages. One particularly onerous result of this situation is that the forward control channel may become so congested with paging messages that access response messages cannot be transmitted. Consequently, a base station's forward control channel can become completely consumed with the sending of paging messages to mobile stations that are not even within the cell associated with the base station (e.g., because the paged mobile stations are within cells associated with other base stations that belong to the same location area). Meanwhile, mobile stations within the base station's cell that are attempting to establish a call, and hence actively receiving and detecting messages in an attempt to detect an access response message, may be unable to do so.

Base station resources that are still available (e.g., traffic channels) may therefore go unused. Because congestion of forward control channel(s) results in lost calls from unsuccessful call setups, the efficient management of the forward control channel(s) is critical for providing

reliable mobile service to mobile stations traveling within the serving coverage area.

An existing approach used in the Personal Digital Cellular Standard (PDC) of Japan (RCR STD-27F) (formerly
5 called the Japanese Digital Cellular System (JDC)) relies on reserved capacity for access response messages and paging messages. In PDC systems, paging messages can consequently never occupy the total capacity. Under the TIA/EIA-136 standard, on the other hand, paging messages can occupy the
10 total capacity. Using a fixed (or slow) assignment of resources, as is done in PDC, is a less than optimal manner for handling traffic capacity. For example, paging messages may become backed up, which causes incoming calls to be lost, while excess capacity reserved for access response messages
15 goes unused. Permitting the entire capacity to be used for paging, as is done in TIA/EIA-136, can cause a mobile that has already contacted the network and is waiting for a response to never receive one. For example, if the entire forward control channel capacity is occupied with higher
20 priority paging messages, then no lower priority access response messages will be transmitted.

SUMMARY OF THE INVENTION

The deficiencies of the prior art are overcome by the method, system, and apparatus of the present invention. For example, as heretofore unrecognized, it would be beneficial to flexibly allocate and/or prioritize paging and access response messages with respect to each other responsive to relevant levels and/or backlogs thereof. In fact, it would be beneficial if paging messages could be delayed when access response messages become too backed up.

In a communications system in which at least two types of messages share a given bandwidth and a first type of message has a higher priority than a second type of message in general situations, a method, system, and apparatus ensures that at least some of the second type of messages are able to be transmitted. When an overload condition is detected, one or more of the first type of messages are diverted (e.g., delayed, deleted, etc.). This enables at least one of the second type of messages to be transmitted.

In one embodiment, paging messages, which have a higher priority, share a preset capacity with access response

messages, which have a lower priority in baseline situations. However, when the number of access response messages reach a predetermined number or when an access response message has been waiting for a predetermined period of time, an overload situation is detected. In response to the detected overload situation, one or more paging messages are diverted so that at least one/some of the backlogged access response messages may be transmitted.

In another embodiment, paging messages are diverted by priority. When an overload condition is first detected, the lowest priority paging messages are diverted in a first stage. If the overload condition persists for a period of time or worsens, then higher priority paging messages are diverted in succeeding stages. Likewise, when backlogged access response messages are enabled for transmission, they may be transmitted in an order from highest to lowest priority.

In yet another embodiment, the above described aspects and embodiments of the present invention may be advantageously realized in a wireless cellular communications system at a cell or sector cell level by an individual base

station thereof, instead of requiring system-wide coordination.

The technical advantages of the present invention include, but are not limited to, the following. It should
5 be understood that particular embodiments may not involve any, much less all, of the following exemplary technical advantages.

An important technical advantage of the present invention is that it enables bandwidth on a forward control
10 channel to be flexibly allocated.

Another important technical advantage of the present invention is that it may flexibly allocate bandwidth in accordance with predetermined guidelines.

Yet another important technical advantage of the present
15 invention is the ability to optimally allocate bandwidth of the forward control channel between paging messages and access response messages.

Yet another important technical advantage of the present invention is the ability to prioritize paging messages over
20 access response messages while still providing at least a minimum capacity for the access response messages.

Yet still another important technical advantage of the present invention is that nothing need be changed during 'normal' traffic periods, but a minimum of traffic handling capacity is reserved during 'peak' periods.

5 The above-described and other features of the present invention are explained in detail hereinafter with reference to the illustrative examples shown in the accompanying drawings. Those skilled in the art will appreciate that the described embodiments are provided for purposes of
10 illustration and understanding and that numerous equivalent embodiments are contemplated herein.

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the method and system of the present invention may be had by reference to the following detailed description when taken in conjunction with the accompanying drawings wherein:

FIGURE 1 illustrates a portion of an exemplary wireless system with which the principles of the present invention may be advantageously practiced;

FIGURE 2 illustrates logical control channels of an exemplary wireless system in accordance with one aspect of the present invention;

FIGURE 3 illustrates an exemplary base station in accordance with the present invention;

FIGURE 4 illustrates an exemplary location area of the exemplary wireless system of FIGURE 1;

FIGURE 5 illustrates an exemplary method in flowchart form in accordance with the present invention;

FIGURE 6A illustrates an exemplary prioritization for paging messages in accordance with the present invention;

FIGURE 6B illustrates an exemplary prioritization for access response messages in accordance with the present invention; and

FIGURES 7, 7A, and 7B illustrate another exemplary
5 method in flowchart form in accordance with the present invention.

DETAILED DESCRIPTION OF THE DRAWINGS

In the following description, for purposes of explanation and not limitation, specific details are set forth, such as particular circuits, logic modules
5 (implemented in, for example, software, hardware, firmware, some combination thereof, etc.), techniques, etc. in order to provide a thorough understanding of the invention. However, it will be apparent to one of ordinary skill in the art that the present invention may be practiced in other
10 embodiments that depart from these specific details. In other instances, detailed descriptions of well-known methods, devices, logical code (e.g., hardware, software, firmware, etc.), etc. are omitted so as not to obscure the description of the present invention with unnecessary detail.

15 A preferred embodiment of the present invention and its advantages are best understood by referring to FIGURES 1-7B of the drawings, like numerals being used for like and corresponding parts of the various drawings.

Referring now to FIGURE 1, a portion of an exemplary
20 wireless system in which the principles of the present

invention may be advantageously practiced is depicted generally at 1. The exemplary wireless system includes a base station 40 for interfacing with mobile terminals 10, 20 that are active within the base station's assigned cell 80.

5 The base station 40 also communicates with an associated mobile switching center 50, which acts as an interface between the base station 40 and backbone networks, such as a Public Switched Telephone Network (PSTN) 60, an Integrated Services Digital Network (ISDN) 70, and other nodes within

10 the (e.g., cellular) wireless network 75. In one embodiment, the base station 40 may be implemented with an omnidirectional antenna which enables the base station 40 to communicate with and control the mobile terminals 10, 20 within the entire cell 80. Alternatively, the base station

15 40 may be implemented with, for example, three directional antennas which divide the cell 80 into three sector cells as illustrated in FIGURE 1 by dashed/dotted lines. The directional antennas enable the base station 40 to selectively communicate with and control mobile terminals

20 within a single sector of the cell 80.

The exemplary wireless system depicted in FIGURE 1 also includes a reverse (uplink) access channel 90 and a forward (downlink) control channel 95 which enable signaling information to be communicated between the base station 40 and the mobile terminals 10, 20 over an air interface. In practice, the forward control channel 95 is typically implemented as a point-to-multipoint communication channel that enables the base station 40 to broadcast control information and other signaling information, such as paging messages, access response messages, acknowledgment messages, etc. to all mobile terminals 10, 20 located within the base station's assigned cell 80. The reverse access channel 90, on the other hand, is typically implemented as a point-to-point communication channel that enables the mobile terminals 10, 20 to communicate signaling information, such as call origination request messages, acknowledgment messages, registration request messages, etc., to the serving base station 40.

In a digital wireless communication system, the reverse access channel 90 and the forward control channel 95 are typically implemented as logical control channels within a

Time Division Multiple Access (TDMA) frame structure.
Referring now to FIGURE 2, logical control channels of an
exemplary wireless system in accordance with one aspect of
the present invention are illustrated generally at 2. These
5 exemplary logical control channels essentially correspond to
the logical control channels of the Digital Control Channel
(DCCH) specified by IS-136 standards. It should be
emphasized that although this aspect of the present invention
is described with reference to IS-136 specifications, persons
10 of ordinary skill in the art will recognize that the
principles of the present invention are not limited to
wireless systems based on IS-136 specifications. Rather, the
principles of the present invention are also applicable to
wireless systems based on, for example, the Global System for
15 Mobile Communications (GSM), the Personal Digital Cellular
System (PDC), and other analog or digital wireless
communication systems or standards in which different types
of messages compete for the same limited bandwidth/capacity.
Therefore, the exemplary logical control channels described
20 below are for purposes of illustration, and not limitation.

With continuing reference to FIGURE 2, the DCCH 2 is divided into a reverse (uplink) access channel 90 that communicates information from a mobile terminal to the base station, and a forward (downlink) control channel 95 that communicates information from the base station to mobile terminals. On the uplink of the DCCH 2, the reverse access channel 90 consists of a single Random Access Channel (RACH) that includes one or more time slots for enabling the mobile terminals 10, 20 to gain access to the wireless network and communicate signaling information to the serving base station 40.

The forward control channel 95 of the DCCH 2 is divided into a number of logical channels, depending on the type of information to be communicated. The SMS point-to-point messaging, paging and access response channel (SPACH) 100, for example, includes a Paging Channel (PCH) 110 for carrying system paging messages, an Access Response Channel (ARCH) 120 for providing system responses to mobile terminal queries and administration information, and a Short Message Service Channel (SMSCH) for carrying short message service (SMS) messages and over-the-air activation and programming. The

Broadcast Control Channel (BCCH), on the other hand, includes
a Fast Broadcast Channel (F-BCCH) for broadcasting
information that mobile terminals need immediately, such as
the system ID and registration information; an Extended
5 Broadcast Control Channel (E-BCCH) for providing information
that is less time critical, such as neighbor cell lists; and
a Service Broadcast Control Channel (S-BCCH) for providing
broadcast messaging services. Finally, the Shared Channel
Feedback (SCF) channel carries information on the downlink
10 that is used to provide a collision-prevention mechanism on
the uplink.

Referring now to FIGURE 3, an exemplary base station in
accordance with the present invention is illustrated. An
antenna 41 of the base station 40 receives signals and
15 forwards them to a transceiver (TRX) 47. The TRX 47 may
forward the signals to filters, demodulators, etc. 48 for
further (e.g., baseband) processing. The TRX 47 and the
filters, demodulators, etc. 48 may be connected to a bus 42,
which interconnects various elements of the base station 40.
20 A controller 43, a processing unit 44, and a memory 45, for
example, may also be connected to the bus 42. It should be

noted that two separate processors (e.g., a controller 43 and
a processing unit 44) are not both necessary for an
embodiment of the present invention. However, many
processors (e.g., one, two, three, or more processors) may
5 alternatively be present within the base station 40.

One or more logic modules 46 may also be part of the
base station 40. The one or more logic modules 46 may be
designed, programmed, etc. to effectuate the principles of
the present invention. In other words, the one or more logic
10 modules 46 may be software residing in the memory 45 (or
another memory (not shown) that may program the processing
unit 44 to implement the principles of the present invention.
Alternatively, the one or more logic modules 46 may be
hardware embodied in the controller 43 (e.g., and application
15 specific integrated circuit (ASIC)) that implements the
principles of the present invention. Other hardware,
software, firmware, some combination thereof, etc. one or
more logic modules 46 alternatives are also within the scope
of the present invention for controlling/effectuating the
20 functions and/or operations of the base station 40, including

those corresponding to the principles of the present invention.

In wireless network systems based on TIA/EIA-136, for example, paging messages intended for mobile terminals are sent over the PCH 110 (of FIGURE 2) of the DCCH 2. In order to save battery power in mobile terminals, paging messages are scheduled in such a way that mobile terminals only need to listen to the DCCH 2 when the PCH 110 is active. Consequently, it is important that the mobile terminals are synchronized to the base station so that a mobile terminal does not miss its own paging messages. When there are no paging messages to send, the SPACH 100 may be used for other messages, such as access response messages on the ARCH 120. Because the interval between paging opportunities for a specific mobile terminal is fixed (e.g., a multiple of 1.28 seconds, the period of a superframe in TIA/EIA-136, for one embodiment), the paging messages on the PCH 110 are given priority over other messages, such as access response messages on the ARCH 120. This prioritization reduces call set-up time.

Referring now to FIGURE 4, an exemplary location area of the exemplary wireless system of FIGURE 1 is illustrated generally at 4. Wireless network systems are structured in paging areas 125 (e.g., a location area), each of which may
5 be composed of, for example, 40 to 60 base stations (e.g., 40 to 60 omnidirectional cells, 120 to 180 three-sector cells, etc.). A mobile terminal 10, 20 is known by the system to be within a particular paging area 125 due to the mobile terminal's registration when arriving (or being
10 activated) therein. When an incoming call to a mobile terminal 10, 20 is detected by the system, a paging message is sent to all base stations 40 (of FIGURE 1) in the paging area 125. Consequently, each single base station 40 (of the 40 to 60 base stations) of the paging area 125 carries a high
15 load of paging messages that are intended for mobile terminals that are camping on other base stations. For example, an incoming call to a mobile terminal 130 causes the base station 40 of the cell 80 to transmit a page, even though the mobile terminal 130 is in a different cell.

20 Prioritizing paging over access responses, as described above, works well under normal load conditions; however, at

a high load, there are so many paging messages being transmitted over the PCH 110 that there is no opportunity to transmit access response messages over the ARCH 120. In other words, all of the capacity of the SPACH 100 is occupied
5 by paging messages, so no access response messages can be sent. This is especially unfortunate inasmuch as messages on the ARCH 120 are almost always sent to a mobile terminal that is actually listening to the DCCH 2 (e.g., because the mobile terminal initiated the exchange by requesting some
10 kind of access to the wireless network). In practice, at least during high load situations, traffic channel messages (sent over the ARCH 120), which are intended, for example, for a mobile terminal 10 already in the process of setting up a call with the base station 40 of the cell 80, will not
15 be sent due to their lower priority with respect to paging messages. These paging messages, which are being sent in lieu of access response messages, may even be to mobile terminals (e.g., the mobile terminal 130) that are not even listening to the base station 40 of the cell 80. However,
20 keeping paging messaging at a higher priority than access

response messaging is important and is preferably maintained, except in high load situations.

Referring now to FIGURE 5, an exemplary method in flowchart form in accordance with the present invention is illustrated generally at 5. In accordance with certain embodiments of the present invention, the paging load on a given base station is reduced when it reaches a level where the base station is unable to adequately send access response messages. In accordance with the present invention, the wireless network (e.g., an individual base station at the cell/sector cell level) regulates the transmission of pages and access responses on the PCH 110 and the ARCH 120, respectively, when detecting an overload condition.

The flowchart 5 reflects a process that may be effectuated by a base station (e.g., the base station 40 using the one or more logic modules 46) in a wireless network. It should be noted that the data analysis, decision making, etc. in accordance with the present invention may also be accomplished elsewhere in the network, such as at the MSC 50. The base station analyzes the access response message(s) situation (step 505). The base station next

determines whether or not an overload condition is detected (step 510). (Determining when an overload condition exists is described in further detail hereinbelow.) If an overload condition is not detected (at step 510), then the base station may again analyze the access response message(s) situation (step 505). If, on the other hand, an overload condition is detected (at step 510), then the base station diverts paging message(s) (step 515). The base station may divert a paging message by delaying or deleting the paging message. If the paging message is delayed, then it may be held (e.g., queued in the memory 45) until the overload condition subsides (and then it may be sent) or until the paging message times out (and then it should no longer be sent).

15 In accordance with certain embodiments of the present invention, the paging message(s) (e.g., from step 515) may be diverted according to a prioritized order. In other words, the least important paging messages are diverted first. If the overload condition subsequently subsides, then
20 the diverted messages (e.g., if delayed) may, for example, be sent. If the overload condition does not subsequently

subside within a predetermined time period, or the overload condition grows increasingly worse, then the next least important messages may be diverted. This prioritization ramping scheme may be continued until paging messages with the highest priority are being diverted. Likewise, in accordance with certain embodiments of the present invention, access response messages may be transmitted from the base station on the ARCH 120 in a prioritized order (e.g., from most important to least important) during, for example, overload conditions.

Referring now to FIGURE 6A, an exemplary prioritization for paging messages in accordance with the present invention is illustrated generally at 6A. As shown at table 6A, paging messages may be assigned various priority levels 605 (e.g., selected from seven (7) different priority levels) and diverted in increasing stages 610. As the overload condition (i) continues for a predetermined period of time or (ii) worsens to an overload condition plus a threshold, more paging messages are diverted 615 as an embodiment progresses through the exemplary three stages. For example, if message waiting indicator (MWI) pages and third attempt voice pages

are being diverted in the first stage 610, but the overload condition does not abate, then short messages service (SMS) pages and second attempt voice pages can also be diverted in a second stage 610. The higher priority first attempt voice
5 pages may also eventually need to be diverted in a third stage 610. It should be understood that other stages 610 and other priorities 605, as well as other (diverted) paging messages 615, may be incorporated into the principles of the present invention.

10 Referring now to FIGURE 6B, an exemplary prioritization for access response messages in accordance with the present invention is illustrated generally at 6B. As shown at table 6B, in parallel with the prioritized, multi-stage approach to diverting paging messages (as shown in FIGURE 6A), the
15 backlog of access response messages may be transmitted 625 according to an exemplary priority 620. For example, digital traffic channel (DTC) designation and voice channel designation access response messages may be transmitted on the ARCH 120 using the first available bandwidth of the SPACH
20 100. When additional capacity becomes (or is made) available on the SPACH 100, registration accept access response

messages may be transmitted on the ARCH 120. It should be understood that other priorities 620, as well as other (transmitted) access response messages 625, may be incorporated into the principles of the present invention.

5 Referring now to FIGURES 7, 7A, and 7B, another exemplary method in flowchart form in accordance with the present invention is illustrated generally at 7. Flowchart 7 illustrates additional exemplary details of a process a wireless network system (e.g., at a base station) may undergo
10 in order to ensure that messages that have a lower priority (e.g., access response messages) are granted at least a portion of bandwidth that is shared with messages that have a higher priority (e.g., paging messages). The process may involve two main phases. In a first phase, an overload
15 situation is detected. In a second phase, the bandwidth sharing is regulated so as to permit the lower priority messages to be transmitted.

Initially, an overload condition is selected, a threshold is set to zero, and a stage is set to one (step
20 705). The access response message situation is analyzed (step 710). In other words, depending on the relevant

overload condition(s) selected (at step 705), the number of
queued access response messages is ascertained, the age of
the oldest queued access response message is ascertained,
both the relevant number and age are ascertained, etc. Next,
5 whether or not the selected overload condition plus the
threshold is met (and/or exceeded) is detected (step 715).
In other words, whether or not the total number of queued
access response messages is greater than a predetermined
number may be detected/determined (step 715A of FIGURE 7A).
10 The predetermined number may correspond to, for example, five
(5) access response messages, which is selected from an
exemplary range of zero (0) to ten (10) access response
messages. Alternatively, whether or not the age of the
oldest queued access response message is greater than a
15 predetermined age may be detected/determined (step 715B of
FIGURE 7B). The predetermined age may correspond to, for
example, 1.28 seconds (a superframe in TIA/EIA-136 systems),
which is selected from an exemplary range of zero (0) to two
(2) seconds. In yet another alternative, detection of either
20 condition can signify an overload situation. In other words,
detection of a condition in accordance with either of steps

715A and 715B can trigger a limitation on the transmission of paging messages. In still yet another alternative, detection of both conditions simultaneously may be required. It should be understood that other criterion/criteria can alternatively be used in accordance with the present invention.

If a selected overload condition (plus a threshold) is not detected (at step 715), then the threshold is decreased (but not below zero) (step 720), and access response message(s) may be transmitted (step 725). After an optional delay (step 730), the access response message situation may be re-analyzed (step 710). If, on the other hand, a selected overload condition (plus a threshold) is detected (at step 715), then paging messages are diverted (as explained hereinabove) in accordance with the current stage or lower (step 735). An exemplary range of paging message diversion stages is explained hereinabove with reference to FIGURE 6A. For example, if the current stage is the first stage, then MWI and third attempt voice pages are diverted. Because at least some paging messages are probably now being diverted, additional bandwidth on the SPACH 100 may be

available. Transmission of access response message(s) (or at least an attempt to do so) follows (step 740). The transmissions (or attempts thereof) may be organized according to priority. An exemplary access response message transmission prioritization is explained hereinabove with
5 reference to FIGURE 6B. It should be noted that the transmission of access response message(s) in step 725 may be prioritized as well.

In the flowchart 7 embodiment of the present invention,
10 the threshold is increased (step 745) (e.g., the threshold increases from zero (0) to one (1) such that the number of queued messages increases from five (5) to six (6) and/or the threshold increases 0.07 seconds such that the age of the oldest queued message is increased from 1.28 to 1.35). This
15 principle of the present invention enables the detection of an increasing backlog of access response messages, even after some regulation (e.g., some diversion of paging messages has been engaged). Next, whether or not the selected overload condition plus the threshold is met (and/or exceeded) is
20 detected (step 750). In other words, whether or not the total number of queued access response messages is greater

than an increased predetermined number may be detected,
whether or not the age of the oldest queued access response
message is greater than an increased predetermined age may
be detected, whether or not both or either condition is true
5 may be detected, etc.

If the increased overload condition is not detected (at
step 750), then it is determined whether a delay time has
elapsed (step 755). The delay time enables the regulation
of the SPACH 100 to continue for a preset period of time
10 before returning to a non-regulated state. In an alternative
embodiment (not specifically illustrated), the regulation
continues until the originally (or at least previously)
detected overload condition is eliminated by the paging
message(s) diversion. Step 755 can therefore be substituted
15 with another detection step that determines whether a
selected overload condition plus a threshold (e.g., a
threshold that is one level below the current threshold level
of step 750) is detected. Continuing now with step 755, if
the delay time has not elapsed, then it is determined again
20 whether or not the selected overload condition plus the
threshold is met (and/or exceeded) (step 750). If the

increased overload condition is detected (at step 750), then the current paging message diversion stage is increased (step 760) (e.g., from the first to the second stage in table 6A). The flowchart 7 may then continue with step 735 while using
5 the increased current stage.

Once a delay time does elapse (at step 755) (e.g., without an increased overload condition developing and being detected (at step 750)), then the threshold is decreased by at least one level (step 765) and the current stage is
10 decreased by at least one (step 770). (A simplifying alternative implementation for the flowchart 7 entails resetting both the threshold and the current stage after an overload condition has been overcome.) The flowchart 7 may then continue with step 715 while using the current stage and
15 threshold. The flowchart 7 may also include a provision for ensuring that the current stage is reduced as it becomes apparent that the overload condition is and/or has subsided (e.g., similar to the step 720 for the threshold). In the
20 alternative embodiment for step 755 as described hereinabove, the flowchart 7 may continue with steps 765 and 770 after the originally (or at least previously) detected overload

condition has subsided as a result of the paging message(s)
diversion (or other external factor(s) such as a reduction
in incoming calls).

Although preferred embodiment(s) of the method, system,
5 and apparatus of the present invention have been illustrated
in the accompanying Drawings and described in the foregoing
Detailed Description, it will be understood that the present
invention is not limited to the embodiment(s) disclosed, but
is capable of numerous rearrangements, modifications, and
10 substitutions without departing from the spirit and scope of
the present invention as set forth and defined by the
following claims.

WHAT IS CLAIMED IS:

1 1. A method for providing bandwidth to access response
2 messages, comprising the steps of:
3 analyzing an access response message situation;
4 determining whether said access response message
5 situation meets a predetermined criterion; and
6 if so,
7 diverting at least one paging message.

1 2. The method according to Claim 1, wherein said step
2 of analyzing an access response message situation comprises
3 the step of determining a number of access response messages
4 that are awaiting transmission.

1 3. The method according to Claim 2, wherein said step
2 of determining whether said access response message situation
3 meets a predetermined criterion comprises the step of
4 determining whether said number exceeds a predetermined
5 threshold.

1 4. The method according to Claim 3, wherein said
2 predetermined threshold comprises five.

1 5. The method according to Claim 1, wherein said step
2 of analyzing an access response message situation comprises
3 the step of determining an age of an oldest access response
4 message that is awaiting transmission.

1 6. The method according to Claim 5, wherein said step
2 of determining whether said access response message situation
3 meets a predetermined criterion comprises the step of
4 determining whether said age exceeds a predetermined period
5 of time.

1 7. The method according to Claim 6, wherein said
2 predetermined period of time comprises 1.28 seconds.

1 8. The method according to Claim 1, wherein said step
2 of analyzing an access response message situation comprises
3 the steps of determining a number of access response messages
4 that are awaiting transmission and determining an age of an
5 oldest access response message that is awaiting transmission.

1 9. The method according to Claim 1, wherein said step
2 of diverting at least one paging message comprises the step
3 of deleting said at least one paging message.

1 10. The method according to Claim 1, wherein said step
2 of diverting at least one paging message comprises the step
3 of delaying said at least one paging message.

1 11. The method according to Claim 10, wherein said step
2 of delaying said at least one paging message comprises the
3 step of delaying said at least one paging message until said
4 access response message situation no longer meets said
5 predetermined criterion or a predetermined period of time
6 elapses.

1 12. The method according to Claim 1, wherein said step
2 of diverting at least one paging message comprises the step
3 of diverting a plurality of paging messages according to
4 respective priority levels of said plurality of paging
5 messages.

1 13. The method according to Claim 12, further
2 comprising the steps of:
3 repeating said steps of analyzing and determining;
4 and
5 diverting additional paging messages of said
6 plurality of paging messages, said additional paging messages
7 associated with a higher priority level.

1 14. A base station enabled to provide capacity to
2 access response messages, comprising:

3 a transceiver;

4 a processor;

5 a memory; and

6 at least one logic module operatively associated
7 with said transceiver and interrelated to at least one of
8 said processor and said memory, said at least one logic
9 module configured to:

10 analyze an access response message situation;

11 determine whether said access response
12 message situation meets a predetermined criterion; and

13 if so,

14 divert at least one paging message.

1 15. The base station according to Claim 14, wherein
2 said at least one logic module is further configured to
3 determine a number of access response messages that are
4 awaiting transmission when analyzing said access response
5 message situation.

1 16. The base station according to Claim 15, wherein
2 said at least one logic module is further configured to
3 determine whether said number exceeds a predetermined
4 threshold when determining whether said access response
5 message situation meets said predetermined criterion.

1 17. The base station according to Claim 16, wherein
2 said predetermined threshold comprises five.

1 18. The base station according to Claim 14, wherein
2 said at least one logic module is further configured to
3 determine an age of an oldest access response message that
4 is awaiting transmission when analyzing said access response
5 message situation.

1 19. The base station according to Claim 18, wherein
2 said at least one logic module is further configured to
3 determine whether said age exceeds a predetermined period of
4 time when determining whether said access response message
5 situation meets said predetermined criterion.

1 20. The base station according to Claim 19, wherein
2 said predetermined period of time comprises 1.28 seconds.

1 21. The base station according to Claim 14, wherein
2 said at least one logic module is further configured to
3 determine a number of access response messages that are
4 awaiting transmission and determine an age of an oldest
5 access response message that is awaiting transmission when
6 analyzing said access response message situation.

1 22. The base station according to Claim 14, wherein
2 said at least one logic module is further configured to
3 delete said at least one paging message when diverting said
4 at least one paging message.

1 23. The base station according to Claim 14, wherein
2 said at least one logic module is further configured to delay
3 said at least one paging message by storing said at least one
4 paging message in said memory when diverting said at least
5 one paging message.

1 24. The base station according to Claim 23, wherein
2 said at least one logic module is further configured to delay
3 said at least one paging message until said access response
4 message situation no longer meets said predetermined
5 criterion or a predetermined period of time elapses when
6 delaying said at least one paging message.

1 25. The base station according to Claim 14, wherein
2 said at least one logic module is further configured to
3 divert a plurality of paging messages according to respective
4 priority levels of said plurality of paging messages when
5 diverting said at least one paging message.

1 26. The base station according to Claim 25, wherein
2 said at least one logic module is further configured to:
3 repeat the analysis and the determination; and
4 divert additional paging messages of said plurality
5 of paging messages, said additional paging messages
6 associated with a higher priority level.

1 27. A method for ensuring that lower priority messages
2 are provided a minimum bandwidth in a wireless communications
3 system, comprising the steps of:

4 providing lower priority messages and higher
5 priority messages that share a given bandwidth;

6 transmitting higher priority messages;

7 determining whether a backlog of lower priority
8 messages exists;

9 diverting at least one higher priority message
10 responsive to an affirmative determination that said backlog
11 of lower priority messages exists;

12 transmitting lower priority messages using
13 bandwidth freed from said step of diverting.

1 28. The method according to Claim 27, wherein said
2 lower priority messages comprise access response messages and
3 said higher priority messages comprise paging messages.

1 29. The method according to Claim 27, wherein said step
2 of determining whether a backlog of lower priority messages
3 exists comprises at least one of the following steps:

4 comparing a number of backlogged lower priority
5 messages to a predetermined overload number; and

6 comparing an age of an oldest backlogged lower
7 priority message to a predetermined overload age.

1 30. The method according to Claim 27, wherein said step
2 of diverting at least one higher priority message responsive
3 to an affirmative determination that said backlog of lower
4 priority messages exists comprises the step of diverting a
5 plurality of higher priority messages in an order determined
6 according to a selected priority ranking.

1 31. The method according to Claim 27, wherein said step
2 of transmitting lower priority messages using bandwidth freed
3 from said step of diverting comprises the step of
4 transmitting a higher priority subset of said lower priority
5 messages before transmitting a lower priority subset of said
6 lower priority messages.

1 32. A method for temporarily prioritizing access
2 response messages over paging messages, comprising the steps
3 of:

4 detecting whether a control channel is overloaded
5 by ascertaining a status of an access response channel;

6 regulating said control channel by reducing the
7 bandwidth of said control channel that is consumed by a
8 paging channel; and

9 transmitting at least one access response message
10 on said access response channel.

SIGNAL PRIORITIZATION IN A COMMUNICATIONS SYSTEM

ABSTRACT OF THE DISCLOSURE

A method, system, and apparatus enables lower priority (e.g., access response) messages to be transmitted instead of higher priority (e.g., paging) messages when the lower priority messages become too backlogged in an environment in which the two types of messages share a given capacity. In other words, when an overload situation is detected, the shared capacity is regulated by ensuring that the lower priority messages have at least some bandwidth. For example, if (i) the lower priority messages reach a predetermined number or (ii) a particular lower priority message has been waiting a predetermined period of time, then at least a portion of the higher priority messages are diverted (e.g., delayed or deleted). In one embodiment, the higher priority messages that are initially diverted are a lowest priority subset of the higher priority messages. In another embodiment, a highest priority subset of the lower priority messages are transmitted first as capacity is made available.

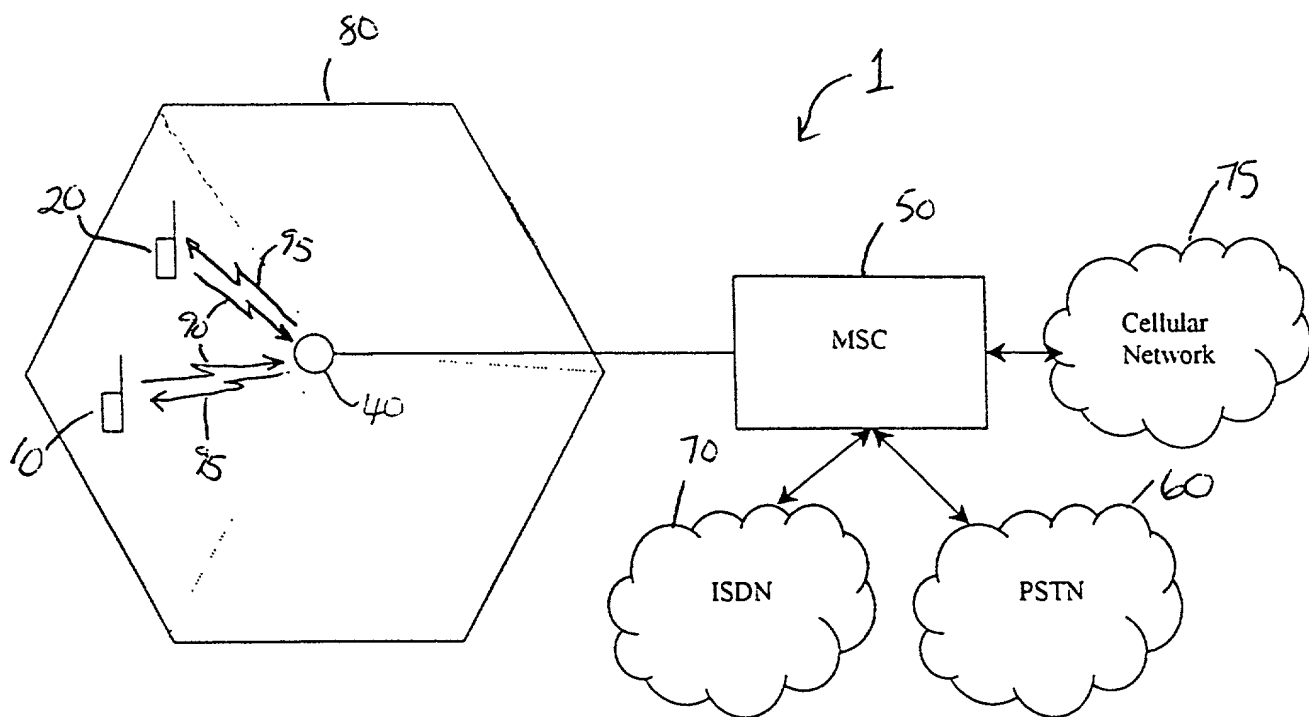


FIGURE 1

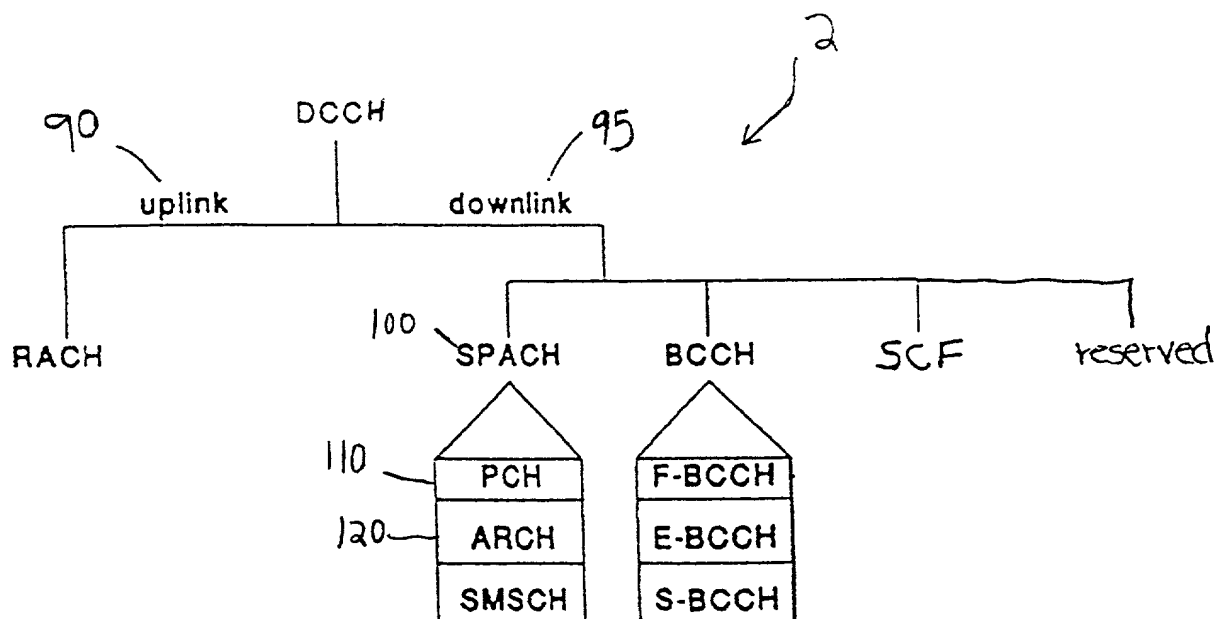


FIGURE 2

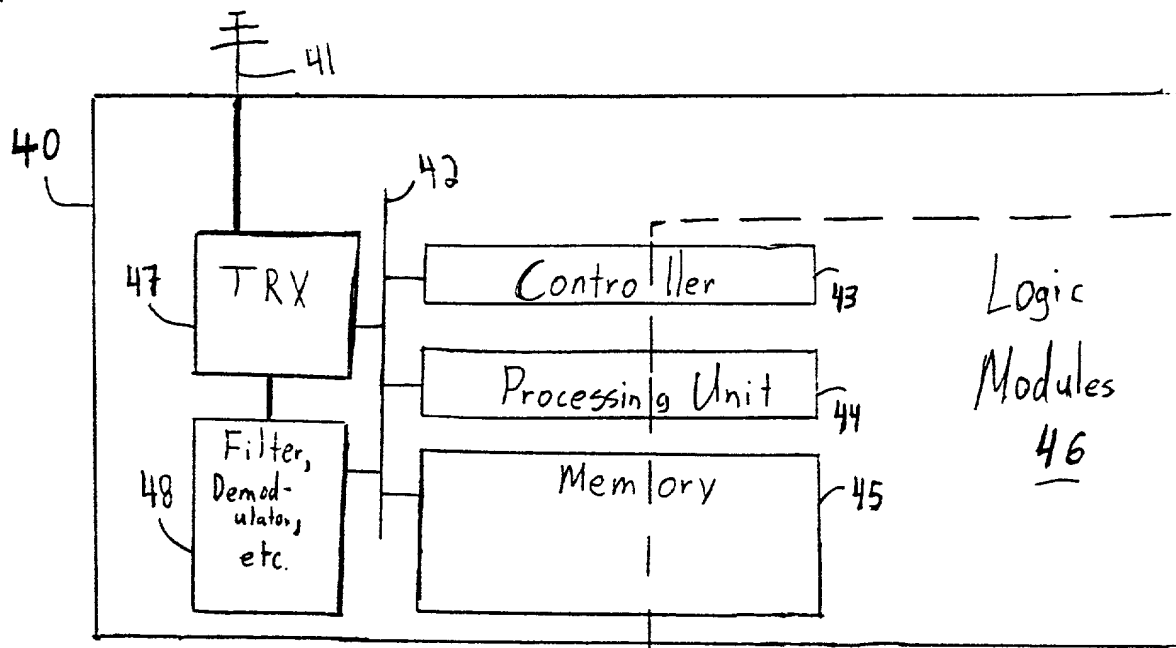


FIGURE 3

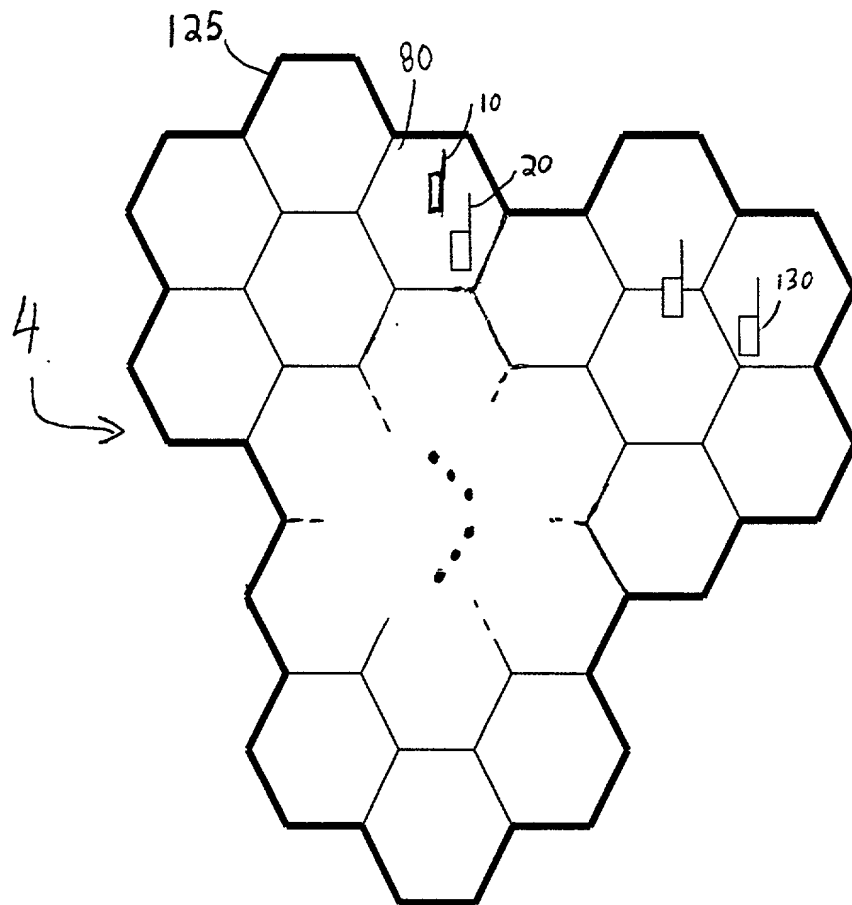


FIGURE 4

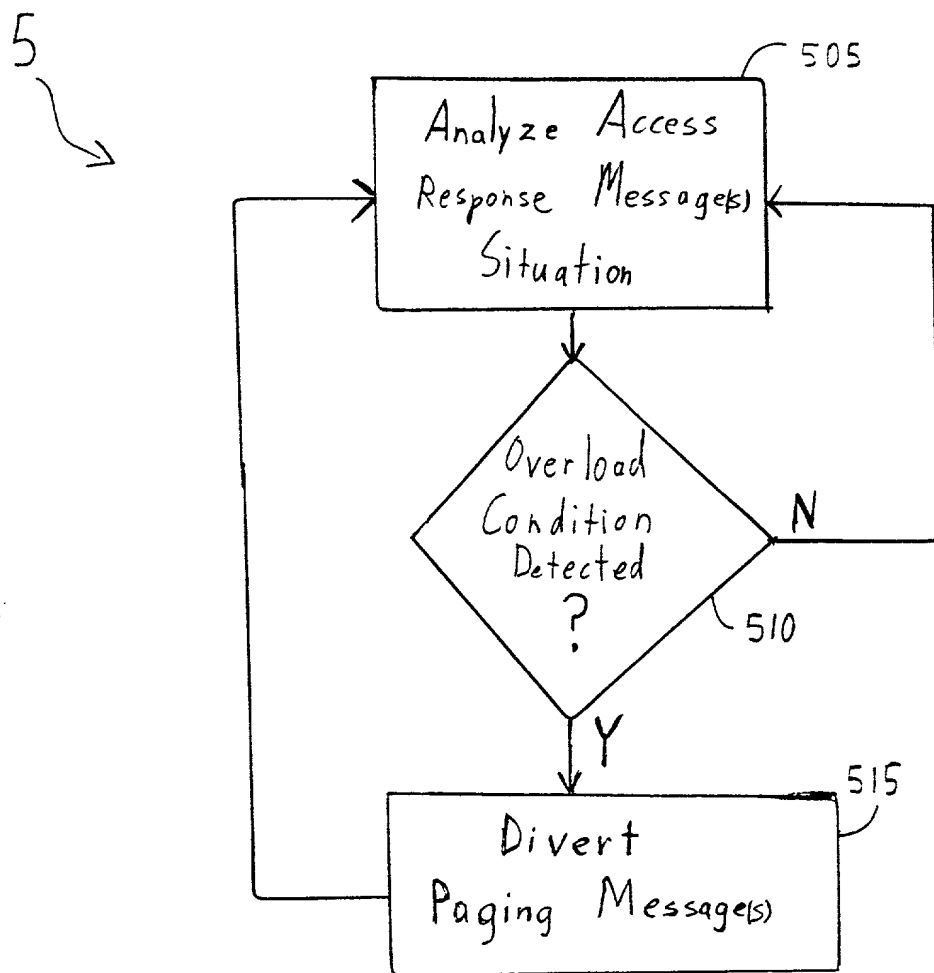


FIGURE 5

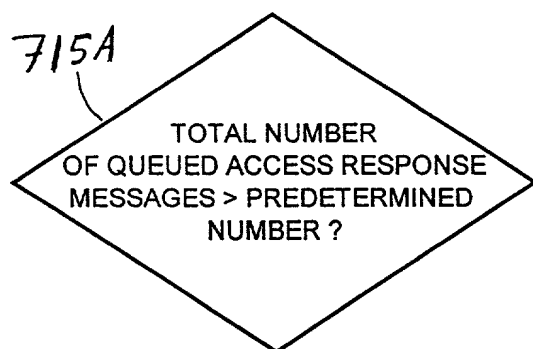


FIGURE 7A

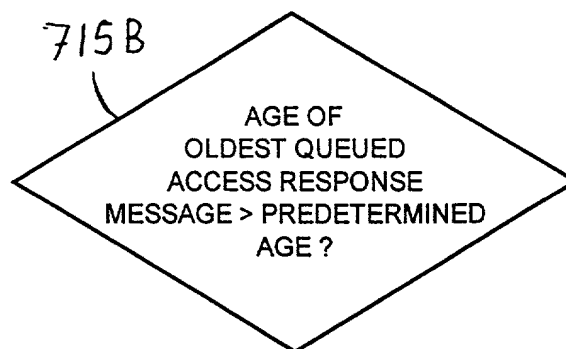


FIGURE 7B

6A

605
PRIORITY

LOWER
↑
HIGHER

STAGE	PAGING MESSAGE (S) DIVERTED	
FIRST	(a) MWI	(b) VOICE PAGE - THIRD ATTEMPT
SECOND	(a) SMS	(b) VOICE PAGE - SECOND ATTEMPT
THIRD	ALL PAGES (including VOICE PAGE - FIRST ATTEMPT)	

610

615

FIGURE 6A

6B

620

625

PRIORITY	ACCESS RESPONSE MESSAGE (S) TRANSMITTED	
HIGHER	(a) DTC DESIGNATION	(b) VOICE CHANNEL DESIGNATION
:	:	:
LOWER	REGISTRATION ACCEPT	

FIGURE 6B

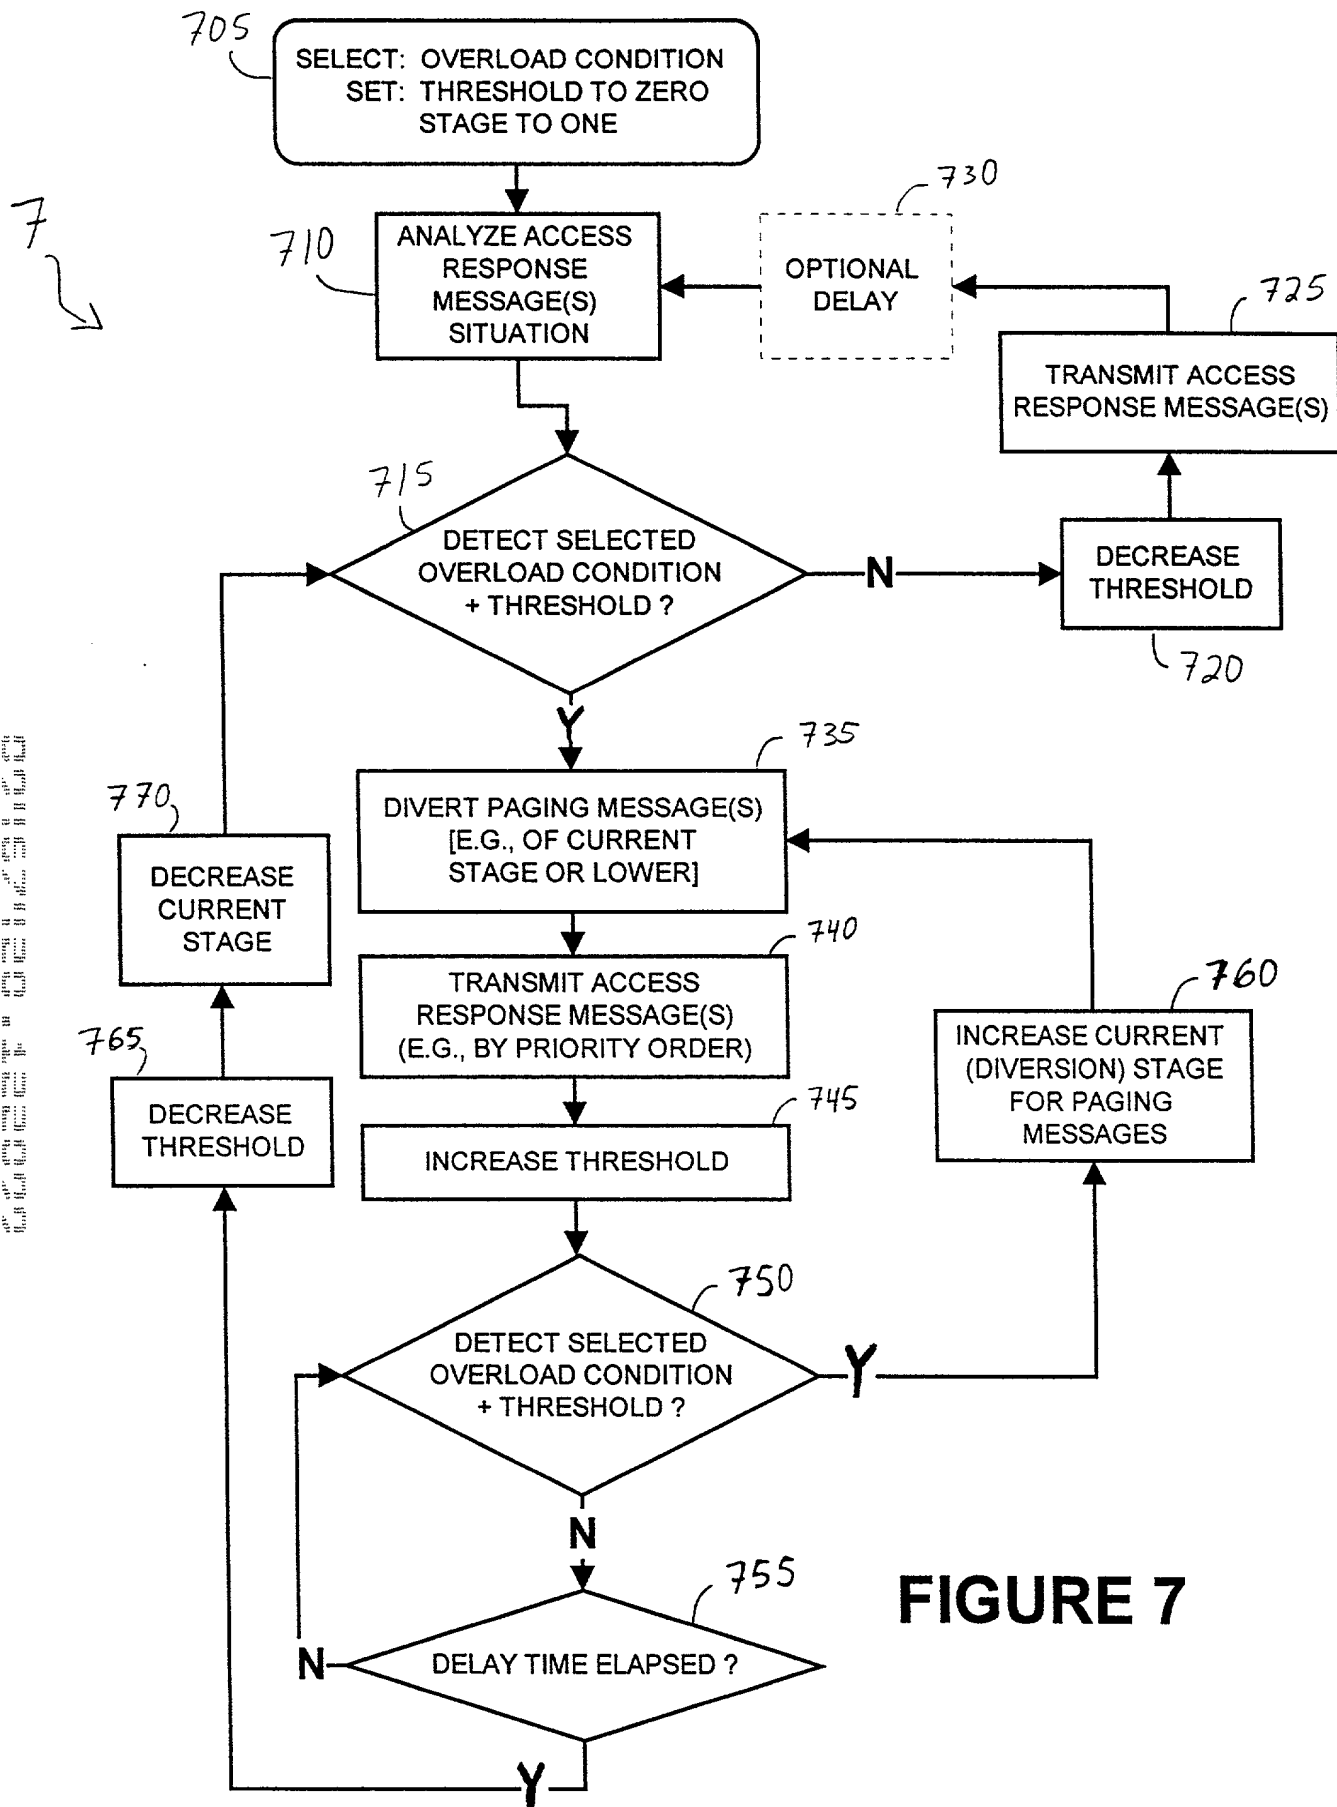


FIGURE 7

RULES 63 AND 67 (37 C.F.R. 1.63 and 1.67)
DECLARATION AND POWER OF ATTORNEY

FOR UTILITY/DESIGN/CIP/PCT NATIONAL APPLICATIONS

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; and

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **SIGNAL PRIORITIZATION IN A COMMUNICATIONS SYSTEM**, the specification of which: (mark only one)

- X (a) is attached hereto.
 (b) was filed on _____ as Application Serial No. _____.
 (c) was filed as _____ on _____ and was amended by Preliminary Amendment on _____.
 (d) was filed on _____ as Application Serial No. _____ and was issued a Notice of Allowance on _____.
 (e) was filed on _____ and bearing attorney docket number _____.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above or as allowed as indicated above.

I acknowledge the duty to disclose all information known to me to be material to the patentability of this application as defined in 37 CFR § 1.56. If this is a continuation-in-part (CIP) application, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability of the application as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this CIP application.

I hereby claim provisional and/or foreign priority benefits under 35 U.S.C. § 119/365 of any provisional and/or foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate filed by me or my assignee disclosing the subject matter claimed in this application and having a filing date (1) before that of the application on which my priority is claimed or, (2) if no priority is claimed, before the filing date of this application:

PRIOR FOREIGN PATENTS OR U.S. PROVISIONAL APPLICATIONS

<u>Number</u>	<u>Country</u>	<u>Month/Day/Year</u> <u>Filed</u>	<u>Priority Claimed</u>	<u>Attorney Docket No.</u>
---------------	----------------	---------------------------------------	-------------------------	----------------------------

I hereby claim the benefit under 35 U.S.C. § 120/365 of any United States application(s) listed below and PCT international applications listed above or below:

PRIOR U.S. OR PCT APPLICATIONS

<u>Application No. (series code/serial no.)</u>	<u>Month/Day/Year Filed</u>
---	-----------------------------

_____	_____
_____	_____

I hereby appoint:

TIMOTHY G. ACKERMANN Reg. No. 44,493
THOMAS E. ANDERSON Reg. No. 37,063
JEFFERY E. BACON Reg. No. 35,055
ARTHUR BRADY Reg. No. 42,356
THOMAS L. CANTRELL Reg. No. 20,849
THOMAS L. CRISMAN Reg. No. 24,846
WILLIAM F. ESSER Reg. No. 38,053
STUART D. DWORK Reg. No. 31,103
H. MATHEWS GARLAND Reg. No. 19,129
J. KEVIN GRAY Reg. No. 37,141
STEVEN R. GREENFIELD Reg. No. 38,166
J. PAT HEPTIG Reg. No. 40,643
JOHN R. KIRK JR. Reg. No. 24,477

ROBERT WILLIAM MASON Reg. No. 42,848
ROGER L. MAXWELL Reg. No. 31,855
ROBERT A. McFALL Reg. No. 28,968
LISA H. MEYERHOFF Reg. No. 36,869
MICHELE MOBLEY Reg. No. 35,616
STANLEY R. MOORE Reg. No. 26,958
RICHARD J. MOURA Reg. No. 34,883
MARK V. MULLER Reg. No. 37,509
P. WESTON MUSSELMAN JR. Reg. No. 31,644
RUSSELL N. RIPPAMONTI Reg. No. 39,521
HOLLY L. RUDNICK Reg. No. 43,065
KEITH W. SAUNDERS Reg. No. 41,462
JERRY R. SELINGER Reg. No. 26,582

KEVIN J. SIMONS Reg. No. 45,110
BOBBY SLATON Reg. No. 43,130
GARY B. SOLOMON, P-44,347
WAYNE O. STACEY Reg. No. 45,125
SCOTT B. STAHL Reg. No. 33,795
ROBERT C. STRAWBRICH, Reg. No. 36,692
ANDRE M. SZUWALSKI Reg. No. 35,701
ALAN R. THIELE Reg. No. 30,694
WILLIAM J. TUCKER Reg. No. 41,356
TAMSEN VALOIR Reg. No. 41,417
RAYMOND VAN DYKE Reg. No. 34,746
BRIAN D. WALKER Reg. No. 37,751
GERALD T. WELCH Reg. No. 30,332

all of the firm of **JENKENS & GILCHRIST, P.C.**, 3200 Fountain Place, 1445 Ross Avenue, Dallas, Texas 75202-2799, as my attorneys and/or agents, with full power of substitution and revocation, to prosecute this application, provisionals thereof, continuations, continuations-in-part, divisionals, appeals, reissues, substitutions, and extensions thereof and to transact all business in the United States Patent and Trademark Office connected therewith, to appoint any individuals under an associate power of attorney and to file and prosecute any international patent application filed thereon before any international authorities, and I hereby authorize them to act and rely on instructions from and communicate directly with the person/assignee/attorney/firm/organization who/which first sent this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct them in writing to the contrary.

Please address all correspondence and direct all telephone calls to:

Keith W. Saunders
Jenkins & Gilchrist, P.C.
3200 Fountain Place
1445 Ross Avenue
Dallas, Texas 75202-2799
214/855-4732
214/855-4300 (fax)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

NAMED INVENTOR(S):

1	Anders Hoff		
	Full Name	Inventor's Signature	Date
	Hägerstensbrinken 98 SE-129 37 Hägersten Sweden		Swedish
	Residence (city, state, country)		Citizenship
	Hägerstensbrinken 98 SE-129 37 Hägersten Sweden		
	Post Office Address (include zip code)		

NAMED INVENTOR(S) (CONT.):

2	Anders Lundström		
	Full Name	Inventor's Signature	Date
	Granlidsvägen 48 SE-653 51 Karlstad Sweden		Swedish
	Residence (city, state, country)		Citizenship
	Granlidsvägen 48 SE-653 51 Karlstad Sweden		
	Post Office Address (include zip code)		